

**SDS**  
**5 1/4" Midwoofer**



**Type Number:** 830887

**Features:**

The Superior Dynamic Sounds (SDS) Series provides the smallest but highest-quality subwoofers in the industry today. Leveraging the best in Danish craftsmanship, but manufactured to be very affordable, these audio transducers are ideal for use in small surround sound systems, but can also be used in a wide variety of end user products and applications. The speakers in this line are combinable with subwoofers in the SLS line--for example, these two products work extremely well together in home theater solutions.



**Driver Highlights:** Shielded for television and PC Applications,  
Coated paper cone, 26 mm coil, AL

[Go to Application Notes.](#)

[Go to Architecture Notes](#)

**Specs:**

**Electrical Data**

Nominal impedance	Zn	8	ohm
Minimum impedance	Zmin	6.5	ohm
Maximum impedance	Zo	33.1	ohm
DC resistance	Re	6	ohm
Voice coil inductance	Le	0.9	mH

**T-S Parameters**

Resonance Frequency	fs	61.5	Hz
Mechanical Q factor	Qms	2.32	
Electrical Q factor	Qes	0.51	
Total Q factor	Qts	0.42	
Ratio fs/Qts	F	146	
Force factor	Bl	6.1	Tm
Mechanical resistance	Rms	1.35	Kg/s
Moving mass	Mms	8.1	g
Suspension compliance	Cms	0.82	mm/N
Effective cone diameter	D	10.5	cm
Effective piston area	Sd	87	cm <sup>2</sup>
Equivalent volume	Vas	8.6	ltrs
Sensitivity		88.5	dB
Ratio BL/√(Re)		2.5	


**Power handling**

100h RMS noise test (IEC)	--	W
Long-term Max System Power (IEC)	--	W
Max linear SPL (rms) @ power	--	dB/W
Short Term Max power	--	W

**Voice Coil and Magnet Parameters**

Voice coil diameter	26	mm
Voice coil height	13	mm
Voice coil layers	2	
Height of the gap	6	mm
Linear excursion +/-	3.5	mm
Max mech. excursion +/-	--	mm
Flux density of gap	--	mWb
Total useful flux	--	mWb
Diameter of magnet	72	mm
Height of magnet	25	mm
Weight of magnet	0.39	Kg

## Frequency:

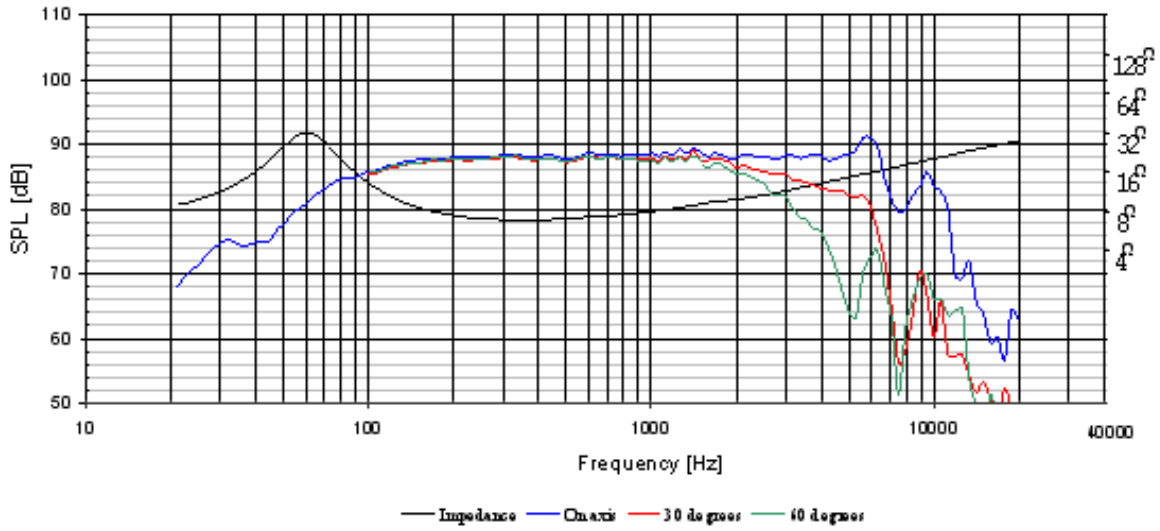

## Mechanical Dimensions:

