


### W14RC25-04



### Silver Flute

- 5-1/2"
- Wool Cone
- Cast Frame
- 25mm VC Ø
- Vented Pole Piece
- Rubber Surround

Znom	4	Ohms	BL	5.07	TM
Sensitivity	90	dB	X-max	3.5	mm
Power	60	watts	Le @ 1kHz	0.52	mH
Fs	42.5	Hz	Frame Ø	142	mm
Qms	3.70		Cutout Ø	122	mm
Qes	0.31		Depth	67	mm
Qts	0.28		Krm	0.913	mΩ
Vas	19.0	Ltrs	Kxm	8.302	mH
Mms	7.95	g	Erms	0.840	
Cms	1767.6	µM/N	Exm	0.684	
Sd	0.0087	M²	Box Rec.:	7 ltrs, 1.5" Ø V x 4.25" L	

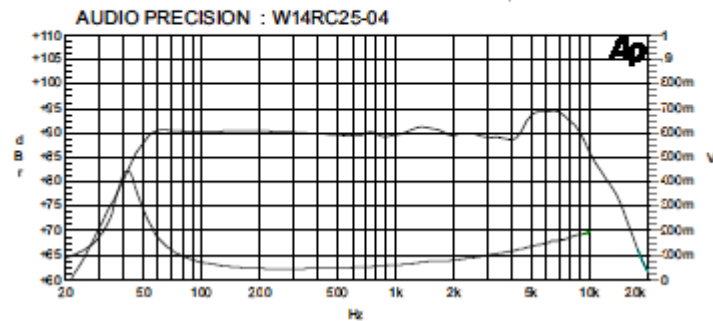

### W14RC25-08



### Silver Flute

- 5-1/2"
- Wool Cone
- Cast Frame
- 25mm VC Ø
- Vented Pole Piece
- Rubber Surround
- F3 of 55Hz in 0.35 ft<sup>3</sup> ported enclosure

Znom	8	Ohms	BL	6.24	TM
Sensitivity	87.5	dB	X-max	3.5	mm
Power	60	watts	Le @ 1kHz	0.77	mH
Fs	43.5	Hz	Frame Ø	142	mm
Qms	3.27		Cutout Ø	122	mm
Qes	0.39		Depth	67	mm
Qts	0.35		Krm	0.876	mΩ
Vas	18.9	Ltrs	Kxm	11.549	mH
Mms	7.58	g	Erms	0.882	
Cms	1760.5	µM/N	Exm	0.691	
Sd	0.0087	M²	Box Rec.:	10 ltrs, 1.5" Ø V x 4.25" L	

