


W17RC38-04



Silver Flute

- 6-1/2"
- Wool Cone
- Cast Frame
- 38mm VC Ø
- Rubber Surround
- Vented Pole Piece
- F3 of 75Hz in 0.21 ft³ vented

Znom	4	Ohms	BL	7.31	TM
Sensitivity	91.5	dB	X-max	5	mm
Power	60	watts	Le @ 1kHz	0.53	mH
Fs	37.5	Hz	Frame Ø	167	mm
Qms	1.52		Cutout Ø	147	mm
Qes	0.28		Depth	75	mm
Qts	0.24		Krm	1.370	mΩ
Vas	25.6	Ltrs	Kxm	17.805	mH
Mms	17.4	g	Erm	0.818	
Cms	1036.1	µM/N	Exm	0.599	
Sd	0.0132	M ²	Box Rec.:	6 liters vented 1.5" Ø x 5.5" L	

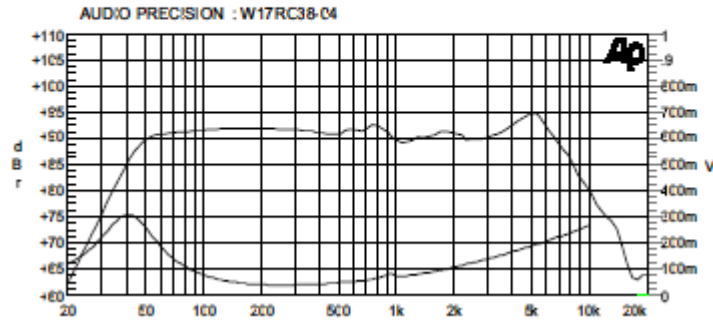

W17RC38-08



Silver Flute

- 6-1/2"
- Wool Cone
- Cast Frame
- 38mm VC Ø
- Rubber Surround
- Vented Pole Piece
- F3 of 60Hz in 0.42 ft³ vented enclosure

Znom	8	Ohms	BL	8.26	TM
Sensitivity	89	dB	X-max	5	mm
Power	80	watts	Le @ 1kHz	0.94	mH
Fs	40.5	Hz	Frame Ø	167	mm
Qms	1.52		Cutout Ø	147	mm
Qes	0.36		Depth	75	mm
Qts	0.29		Krm	2.001	mΩ
Vas	28.2	Ltrs	Kxm	36.187	mH
Mms	13.57	g	Erm	0.836	
Cms	1140.0	µM/N	Exm	0.582	
Sd	0.0132	M ²	Box Rec.:	12 ltrs, 2" Ø V x 6" L	

