


Features:

- Ribbon Tweeter
- 2K Hz to 40K Hz Response
- 92 dB Sensitivity
- 6 Ohm Impedance
- Laminated Aluminum Diaphragm
- Ultra-thin Diaphragm

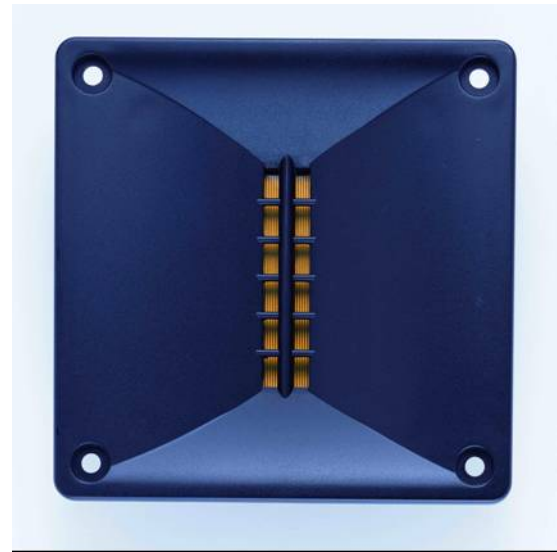

Specifications:

| | |
|-----------------------|---|
| Nominal Impedance | 6 Ohm |
| Frequency Response | 2K Hz ~ 40K Hz |
| Sensitivity | 92 dB @ 1W/1m |
| Recommended Crossover | More than 2.5 K Hz |
| Power Handling | 40 W Continuous / 3 rd Crossover, $Q \leq 0.707$ |
| Diaphragm | Laminated Aluminum |
| Magnet | Nd-Fe-B |
| Weight | 175 grams |

