




AMT2-4 Air Motion Transformer Tweeter 4 Ohm

AMT2-4

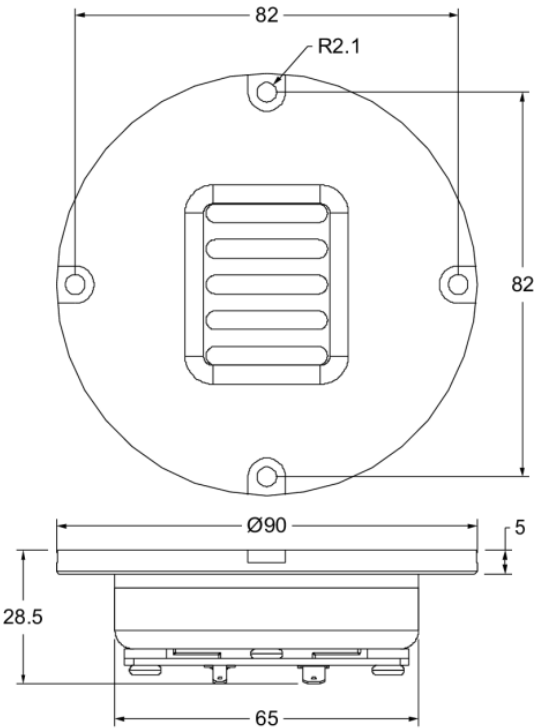

FEATURES

- Advanced Air Motion Transformer design "squeezes" air molecules instead of shoving or crushing them
- Folded Kapton ribbon diaphragm delivers clean, detailed, and highly dynamic output
- Round metal faceplate provides easy mounting and a classic look
- Powerful, lightweight neodymium magnet structure for low distortion and high efficiency
- Sonically similar to the best metal ribbon and planar tweeters


PARAMETERS

|                             |                      |
|-----------------------------|----------------------|
| Impedance                   | 4 ohms               |
| Re                          | 3.5 ohms             |
| Le                          | N/A                  |
| Fs                          | N/A                  |
| Qms                         | 2.92                 |
| Qes                         | N/A                  |
| Qts                         | 2.86                 |
| Mms                         | N/A                  |
| Cms                         | N/A                  |
| Sd                          | 8.91 cm <sup>2</sup> |
| Vd                          | N/A                  |
| BL                          | N/A                  |
| Vas                         | N/A                  |
| Xmax                        | N/A                  |
| VC Diameter                 | N/A                  |
| SPL                         | 92.5 dB @ 2.83V/1m   |
| RMS Power Handling          | 15 watts             |
| Usable Frequency Range (Hz) | 2,500 - 22,000 Hz    |

IMPEDANCE/PHASE



FREQUENCY RESPONSE

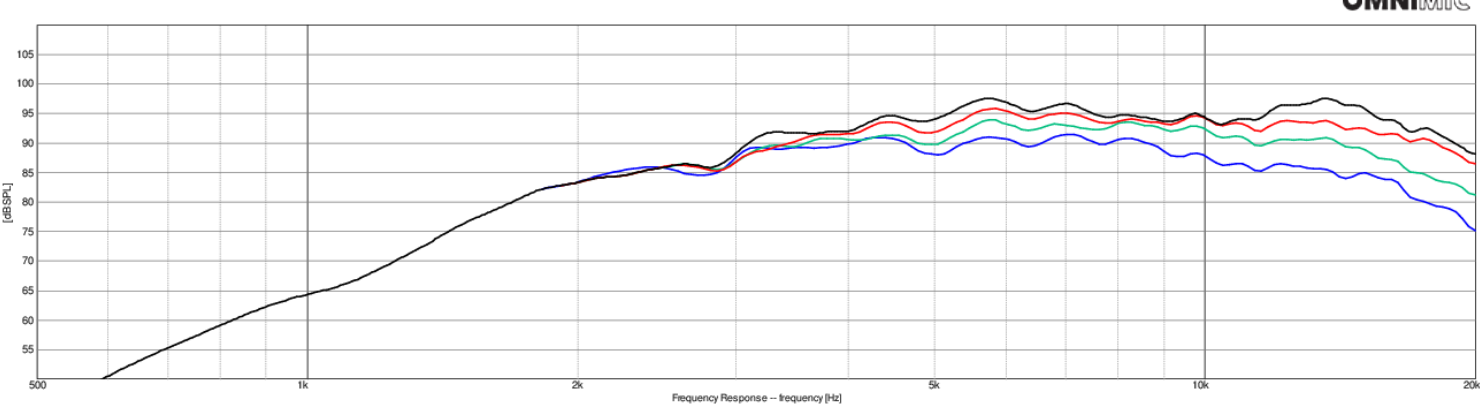

Note: 1/24<sup>th</sup> octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°  
Red = 15°  
Green = 30°  
Blue = 45°